

AndonWIRELESS / Andon product

AndonWirelessBOX 2-Button 868 MHz



Part No.: 860.000.16



MECHANICAL DATA

| | |
|-----------------------------|--------------------------------|
| Length | 103 mm |
| Width | 66 mm |
| Height | 35 mm |
| Materials | PC PC/ABS |
| Housing colour | Black Grey |
| Protection category | IP30 |
| Type of fixing | Base mounting Wall mounting |
| Working temperature minimum | 0°C |
| Working temperature maximum | +40°C |
| Weight with packaging | 435 g |
| Product weight | 283 g |

ELECTRICAL DATA

| | |
|-----------------------------|------------------------------|
| Operating voltage | 115-230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz at 230V 60Hz at 115V |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 230 VAC |
| Rated operational current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 2 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |
| Radio range max. | 300 m |
| Radio transmission power | 10 dBm at 50 Ohm |
| Radio frequency min/max | 868.000 MHz 868.600 MHz |
| Radio channels | 6 |
| connectivity | USB |

APPROVAL DATA

| | |
|------------------------------|-----|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with CCC | No |
| Conforms with UL | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

AndonWIRELESS / Andon product

AndonWirelessBOX 2-Button 868 MHz

| | |
|-------------------------------|-----------------------|
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | No |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | 10 years |
| Conforms with VdS | No |

DRAWING

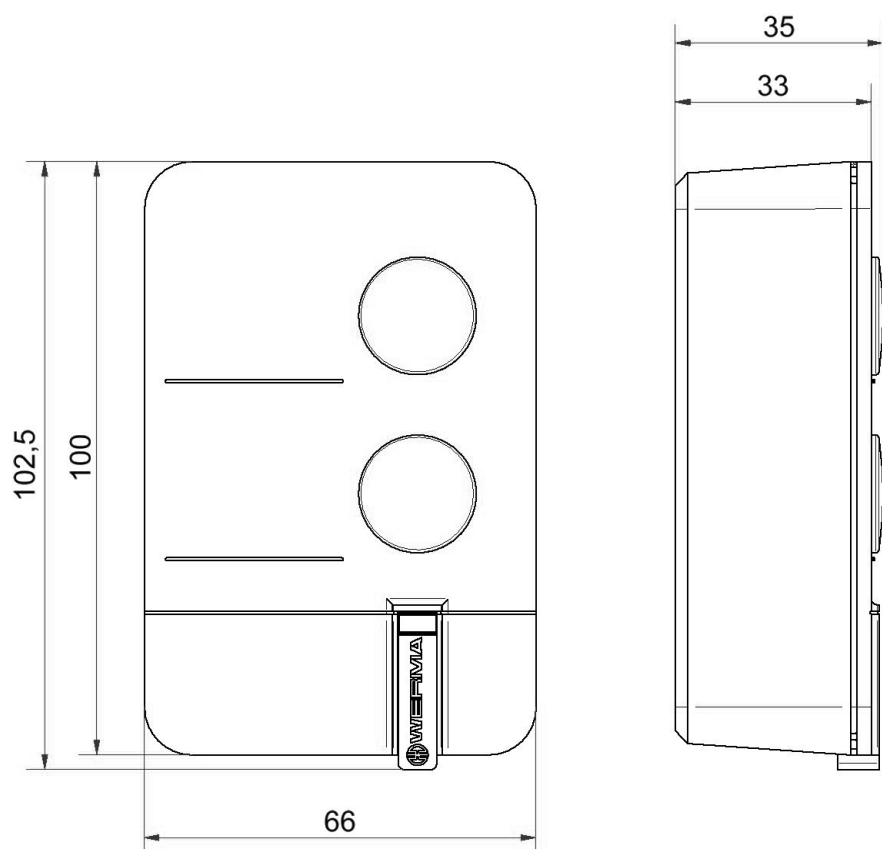

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.