Modular Signal Towers / KombiSIGN 72 TwinLIGHT Classic 24VAC/DC BU



ļ

| Part No.: | 647.510.75 | |
|------------------------------|--------------|---------------------------------|
| Series: | KombiSIGN 72 | |
| MECHANI | CAL DATA | |
| Height | | 66 mm |
| Diameter | | 70 mm |
| Materials | | PC |
| Dome colour | | Blue |
| Protection category | | IP65 |
| Working temperature minimum | | -30°C |
| Working temperature maximum | | +60°C |
| Weight with packaging | | 91 g |
| Product weight | | 77 g |
| ELECTRIC | AL DATA | |
| Operating voltage | | 24V |
| Operating voltage type | | AC/DC |
| Operating voltage frequency | | 50Hz |
| Operating voltage tolerance | | +/- 10% |
| Rated operational voltage | | 24 VDC |
| Rated operational current | | 80 mA |
| Rated inrush current | | 500 mA |
| Protection class | | Protection class 2 |
| Pollution degree | | 3 |
| OPTICAL | DATA | |
| Light source | | LED |
| Light colou | r | Blue |
| Optical signal image | | Blink Permanent TwinLight |
| Blink frequency | | 1 Hz |
| Service life optical | | 50,000 h maximum |
| APPROVA | L DATA | |
| Conforms with CE | | Yes |
| Conforms with RoHS directive | | Yes |
| WEEE | | Yes |
| Conforms with ATEX-directive | | No |
| Conforms with CCC | | No |
| Conforms with UL | | cULus |
| UL Type Rating | | Туре 12 |
| Conforms with FCC | | No |
| Conforms with IC | | No |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Modular Signal Towers / KombiSIGN 72 TwinLIGHT Classic 24VAC/DC BU

| EAC certificate available | Yes |
|-------------------------------|-----------------------|
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |
| MTTF-value [years] | 2880 |
| | |

DRAWING

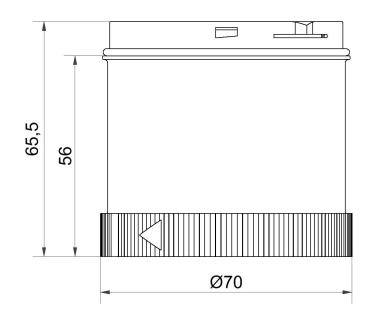

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.