
## Completely pre-assembled Signal Towers / eSIGN eSIGN 15 Segments with Siren BK



Į.

Part No.:	657.600.55	
Series:	eSIGN	
MECHANI		
	CAL DATA	
Height		372 mm
Diameter		72 mm
Materials		PC
Dome colour		Tranclucent
Housing co	lour	Black
Protection	category	IP66 IP69K
Connection		M12 plug 0

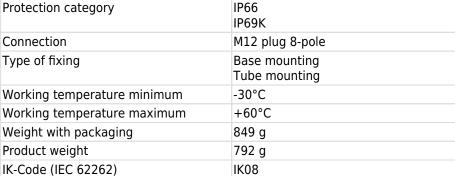

## ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	620 mA
Rated inrush current	800 mA
Protection class	Protection class 3
Pollution degree	3
Overvoltage category	l
Isolation voltage	Ui = 50V / Uimp = 330V
Request to external PSU	SELV/PELV
connectivity	Digital entrance USB

## OPTICAL DATA

OPTICAL DATA	
Light source	LED
Light colour	MC >1.000.000 colours
Optical signal image	Blink Double flash Flash Permanent Revolving Triple flash

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


## Completely pre-assembled Signal Towers / eSIGN eSIGN 15 Segments with Siren BK

Blink frequency	Configurable
Service life optical	50,000 h maximum
ACOUSTIC DATA	
Volume (max) at 1m distance	105 dB
Acoustic signal image	Multi-tone
Number of tones	10 tone
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 4/4X/12/13
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

Completely pre-assembled Signal Towers / eSIGN eSIGN 15 Segments with Siren BK

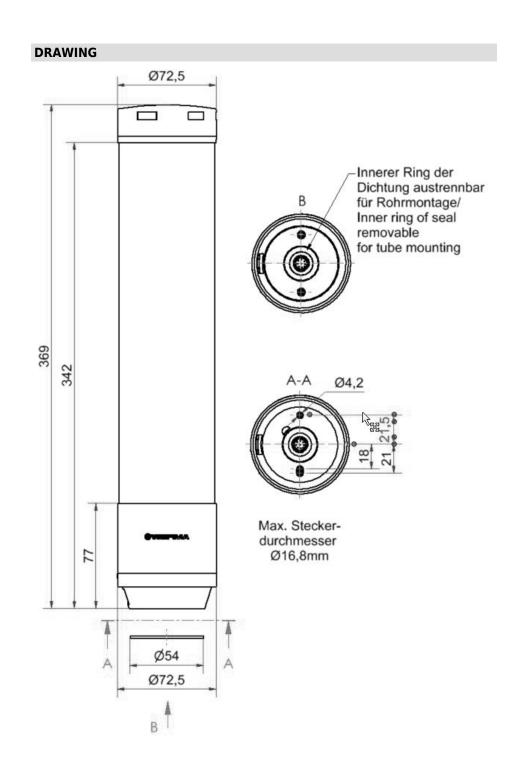

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.