Completely pre-assembled Signal Towers / eSIGN eSIGN 9 Segments with Siren WH



!

Part No.:	657.300.55
Series:	eSIGN

MECHANICAL DATA



MECHANICAL DATA	
Height	271 mm
Diameter	72 mm
Materials	PC
Dome colour	Tranclucent
Housing colour	White
Protection category	IP66 IP69K
Connection	M12 plug 8-pole
Type of fixing	Base mounting Tube mounting
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	622 g
Product weight	575 g
IK-Code (IEC 62262)	IK08
ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	405 mA
Rated inrush current	800 mA
Protection class	Protection class 3
Pollution degree	3
Overvoltage category	I
Isolation voltage	Ui = 50V / Uimp = 330V
Request to external PSU	SELV/PELV
connectivity	Digital entrance USB
OPTICAL DATA	
Light source	LED
Light colour	MC >1.000.000 colours
Optical signal image	Blink Double flash Flash Permanent
Blink frequency	Configurable

50,000 h maximum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Service life optical


Completely pre-assembled Signal Towers / eSIGN eSIGN 9 Segments with Siren WH

105 dB
Multi-tone
10 tone
5,000 h minimum
Yes
Yes
Yes
No
No
No
cULus
Type 4/4X/12/13
No
No
No
Yes (WERMA (UK) Ltd.)
No
39

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

Completely pre-assembled Signal Towers / eSIGN eSIGN 9 Segments with Siren WH

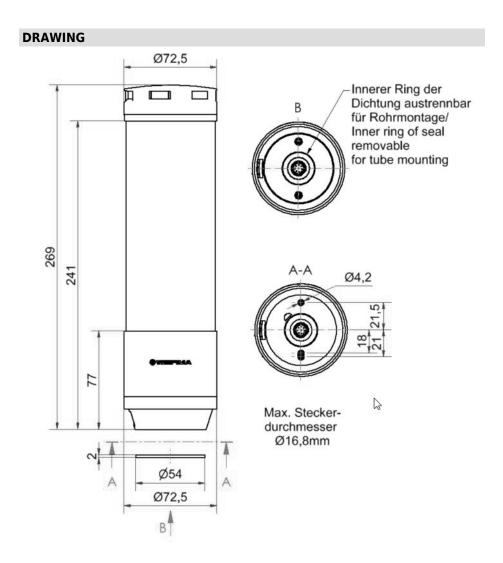

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.