

Systems for optimising production / WeASSIST

WeASSIST Gateway 921 MHz



Part No.: 862.000.02



MECHANICAL DATA

| | |
|-----------------------------|--|
| Length | 186 mm |
| Width | 115 mm |
| Height | 50 mm |
| Materials | PC |
| Housing colour | Black Grey |
| Protection category | IP20 |
| Connection | Plug-in connection RJ45 USB |
| Type of fixing | Adapter required Base mounting Special version Tube mounting Wall mounting |
| Working temperature minimum | 0°C |
| Working temperature maximum | +40°C |
| Weight with packaging | 803 g |
| Product weight | 648 g |

ELECTRICAL DATA

| | |
|-----------------------------|----------------------------|
| Operating voltage | 115-230V |
| Operating voltage type | AC |
| Operating voltage frequency | 50Hz 60Hz |
| Operating voltage tolerance | +/- 5% |
| Rated operational current | 1000 mA |
| Protection class | Protection class 2 |
| Pollution degree | 2 |
| Overvoltage category | II |
| Isolation voltage | Ui = 250V; Uimp = 2.500V |
| Radio frequency min/max | 921.000 MHz 922.000 MHz |
| connectivity | Ethernet WeASSIST |

APPROVAL DATA

| | |
|------------------------------|--------------------------------|
| Conforms with CE | No |
| Conforms with RoHS directive | Fulfills substance restriction |
| WEEE | Yes |
| Conforms with ATEX-directive | No |



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Systems for optimising production / WeASSIST

WeASSIST Gateway 921 MHz

| | |
|---------------------------|-------|
| Conforms with CCC | No |
| Conforms with UL | cULus |
| Conforms with FCC | Yes |
| Conforms with IC | Yes |
| EAC certificate available | No |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Systems for optimising production / WeASSIST

WeASSIST Gateway 921 MHz

DRAWING

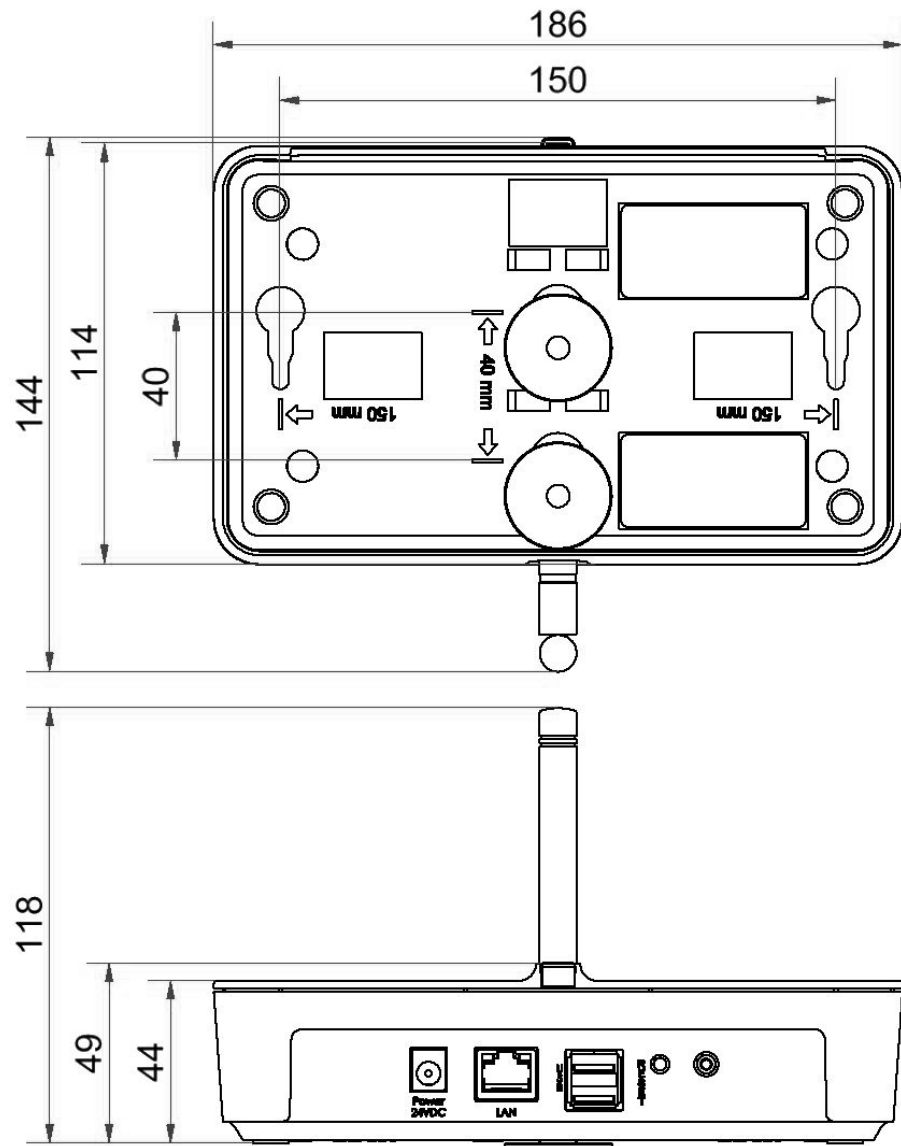

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.