

KombiSIGN 71 / WIN

## KombiSIGN 71 reflect 24V BK



Part No.: 861.640.01



### MECHANICAL DATA

Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Tension relief	Not present
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	213 g
Product weight	178 g

### ELECTRICAL DATA

Operating voltage	24V
Operating voltage type	AC/DC
Operating voltage frequency	50Hz
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	900 mA
Rated inrush current	430 mA
Protection class	Protection class 2
Pollution degree	3
Request to external PSU	SELV/PELV

### APPROVAL DATA

Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.


KombiSIGN 71 / WIN

## KombiSIGN 71 reflect 24V BK

Conforms with VdS

No

### DRAWING

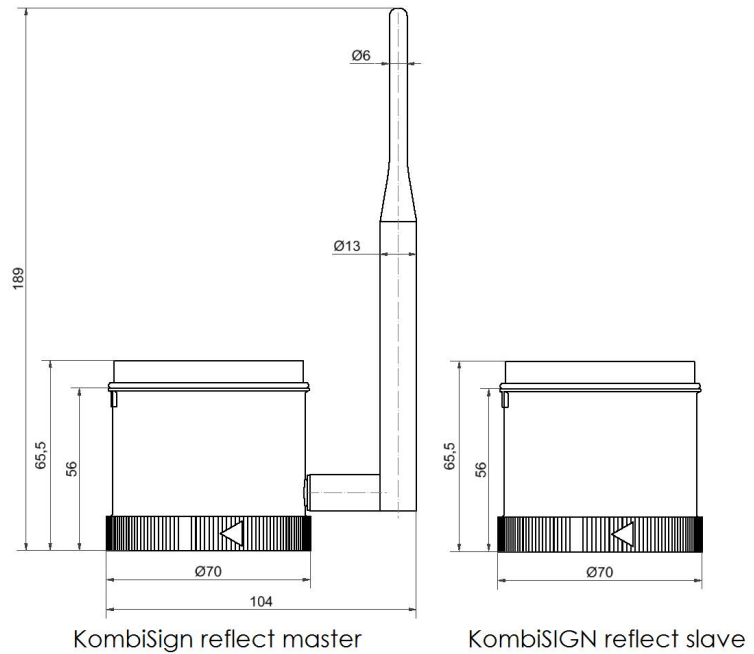

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.