

AndonWIRELESS / Andon product

WeAssist/AndonWireless Transceiver921MHz





MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	89 g
Product weight	68 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Rated operational current	60 mA
Protection class	Protection class 3
Pollution degree	3
Radio frequency min/max	921.000 MHz
Radio channels	6

APPROVAL DATA	
Conforms with CE	No
Conforms with RoHS directive	Fulfills substance restriction
WEEE	Yes
Conforms with CCC	No
Conforms with UL	cULus
Conforms with FCC	Yes
Conforms with IC	Yes
EAC certificate available	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



AndonWIRELESS / Andon product

WeAssist/AndonWireless Transceiver921MHz

DRAWING

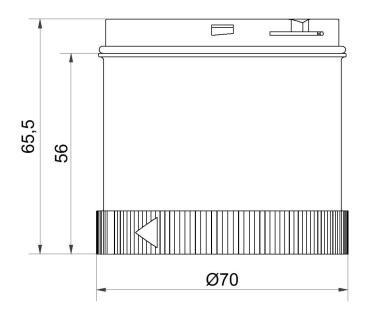

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.